



The ICAM ILQ detector is a cost-effective Aspirated Smoke Detection (ASD) solution that meets the unique needs of numerous small area applications of up to 100 m<sup>2</sup> (1,000 ft<sup>2</sup>). Examples of these include telco landline remote offices, base station controllers, remote base stations, small server rooms, data centre containers, critical equipment, packaged HVAC units, anechoic chambers, pump houses, generator enclosures, signalling huts and modular laboratories, just to name a few.

ILQ detectors are suitable for both high and normal sensitivity applications and offer many installation advantages in terms of out-of-box operation, stand-alone functionality and simplified pipe network.

### How it Works

The ILQ detector actively draws air from the protected area through a pipe network where two or four holes are used. The ILQ has two pipe inlets and there are always one or two holes on each pipe. Sampled air is then filtered before being analyzed by the detection chamber.

The detection chamber utilizes a laser light source and photoelectric receiver circuitry to detect scattered light caused by the presence of smoke.

Alarm (Pre-Alarm & Fire) and Fault conditions are reported by activating the corresponding LEDs on the simple display and dry contact relays.

The system allows configuration of both smoke alarm and flow fault thresholds to suit the application needs.

### Configuration Options

Convenient and expedient configuration of the ILQ detector is available via DIP switches for true out-of-box operation. A USB communication interface is also available for the Xtralis QSC Configuration and Fire System Management Software application.

### Inputs and Outputs

The ILQ detector provides a programmable General Purpose Input (GPI) for remote Reset, Reset + Disable, Stand-by and External Device (PSU) monitoring functions. Three dry contact relay outputs are available for Alarm and Fault annunciation.

### Features


- Laser-based absolute smoke detection
- Clean air barrier for optics protection
- Up to 100m<sup>2</sup> (1,000 ft<sup>2</sup>) coverage
- Up to 2 x 6 m (20 ft) linear or up to 2 x 9 m (30 ft) branched pipe lengths
- 2 or 4 Class A / VEVFD sampling holes
- Metric/Imperial pipe inlets
- Pre-alarm, Alarm and Fault Relays
- 5 LEDs, Pre-alarm, Fire, Fault, Filter, Power
- Monitored on-board filter
- AutoLearn™ Smoke
- General Purpose Input (GPI)
- IP30 enclosure
- Xtralis QSC support
- USB port for PC connection
- Event log
- Low power consumption
- Configuration via DIP switches
- Various mounting options

### Listings / Approvals

- UL
- ULC
- CE
- LPCB
- EN 54-20
  - Class A, B & C with 4 holes
- Other approvals pending

Regional approvals listings and regulatory compliance vary between product models.

### Dimensions

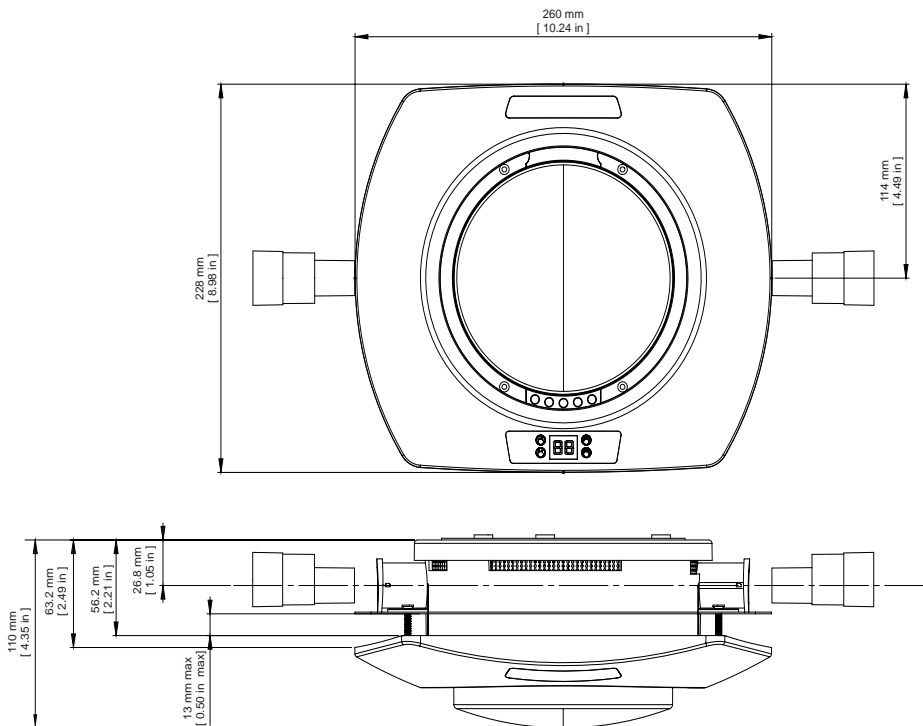

### Specification

#### Supply voltage:

24 VDC nominal (18 to 30 VDC), externally supplied

#### Current consumption:

170 mA (quiescent), 190 mA (max)

#### Dimensions (WHD):

260 mm x 228 mm x 110 mm  
(10.24 in x 8.98 in x 4.35 in)

#### Weight:

1.2 Kg (2.65 lbs)

#### Operating conditions:

Recommended Detector Ambient: 0°C to 39°C  
(32°F to 103°F)\*

Tested to: -10°C to 55°C (14°F to 131°F)

Humidity: 0% to 95% RH, non-condensing

#### Inlet Pipe Size

Accepts both metric and imperial standard pipe sizes

Metric: 25 mm external diameter

Imperial: 1.05 in (3/4" pipe) external diameter

#### Sampling network:

Pipe Length: Up to 2 x 6 m (2 x 20 ft) linear,

up to 2 x 9 m (2 x 30 ft) branched

Sampling Holes: 2 or 4 (1 or 2 per pipe)

#### Sensitivity Range:

0.005% - 3.0% obs/m (0.0015% - 0.915% obs/ft)

#### Threshold Setting Range:

Fire Alarm: 0.15%/m - 3%/m (0.046%/ft - 0.915%/ft)

Pre-Alarm: 0.1%/m - 1.5%/m (0.03%/ft - 0.457%/ft)

#### Alarm and Flow Delays:

0 - 60 seconds

#### AutoLearn:

Smoke

#### Indication:

5 LEDs for Pre-alarm, Fire, Fault, Filter and Power

#### IP rating:

IP30

#### Filtration:

Field replaceable and monitored

#### Flow Monitoring and Reporting:

High and Low adjustable

#### Fan control:

2 x fans at fixed speed, supervised

#### Relays:

3 Relays rated 2 A @ 30 VDC (Pre-alarm, Fire, Fault)

#### PC Connection:

USB

#### General Purpose Input (GPI):

Reset, Reset + Disable, Stand-by and External Device (PSU) monitoring

#### Event Log:

1,000 events

#### Cable termination:

Screw terminal blocks (0.2-2.5 sq mm, 30-12 AWG)

#### Warranty period:

2 years

\* Product UL listed between 0°C to 39°C (32°F to 102°F)

### Approvals Compliance

Please refer to the Product Guide for details regarding compliant design, installation and commissioning.

### Ordering Information

ICAM ILQ Aspirated Smoke Detector	ILQ-100
Surface Mount Kit	ISP-420
Flush Mount Kit	ISP-421
Replacement Filter	ISP-422
Replacement Filter (20 pieces)	ISP-422-20
Pipe Kit (Metric)	ISP-423
Pipe Kit (Imperial)	ISP-423-US

www.xtralis.com

UK and Europe +44 1442 242 330 D-A-CH +49 431 23284 1 The Americas +1 781 740 2223

Middle East +962 6 588 5622 Asia +86 21 5240 0077 Australia and New Zealand +61 3 9936 7000

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

Xtralis, Xtralis logo, The Sooner You Know, VESDA, ICAM, ECO, OSID, HeiTel, ADPRO, IntrusionTrace, and LoiterTrace are trademarks and/or registered trademarks of Xtralis and/or its subsidiaries in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis. You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.