

Addressable Call Points



Product Description


A comprehensive range of callpoints for use with FireClass addressable systems using the robust and reliable, FireClass open protocol. All the callpoints are designed to enable an alarm signal to be given by breaking a glass element with the option of a resettable deformable element. This operates a switch and is indicated by an LED indicator. If required, an optional transparent hinged cover may be installed to guard against accidental operation. Both indoor and outdoor versions are available.

General Features

- Integral LED indicator for easy identification of operation
- Surface or Flush Mounting
- Test key facility, speeds maintenance visits
- Optional transparent hinged cover
- IP67 Waterproof models for external applications

Product Codes

- 514.800.803** FC420CP FireClass Addressable Manual Call Point
- 514.800.804** FC421CP FireClass Addressable Weatherproof Manual Call Point
- 2501014** Spare Glasses for Manual Call Point (Pack of 5)
- 2501240** Back Box for Manual Call Point
- 2501101** Manual Call Point Plastic Hinged Cover
- 2501040** Spare Manual Call Point Keys (Pack of 10)
- 515.001.127** Plastic Deformable Call Point Element

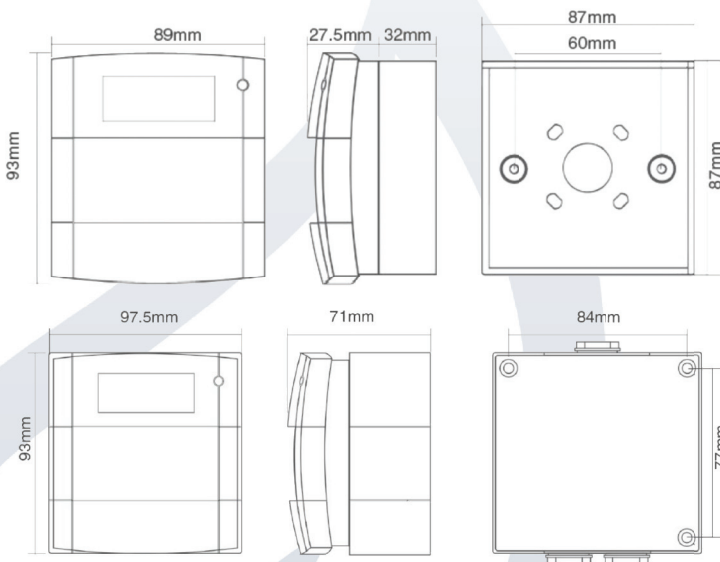

MODEL	DIMENSIONS (mm)	WEIGHT	OPERATING TEMPERATURE	I.P. RATING
Indoor Addressable Call Point	93H x 89W x 59.5D (27.5 mm flush mount)	110g	-10° to +55°C	24D
Outdoor Addressable Call Point	93H x 97.5W x 73D	240g	-25° to +70°C	67